




REV	DESCRIPTION	DWG. BY	CHK	ENG	DATE
1	DECREASED FRIT THICKNESS AREA BELOW TAIL PADS	RS	TG		11/10/09

CONNECTOR PIN ASSIGNMENT

PIN#	DESCRIPTION
1	UL
2	UR
3	LR
4	LL
5	BS
6	GND
7	CLK
8	CS
9	Vcc
10	DO
11	DI
12	DGND

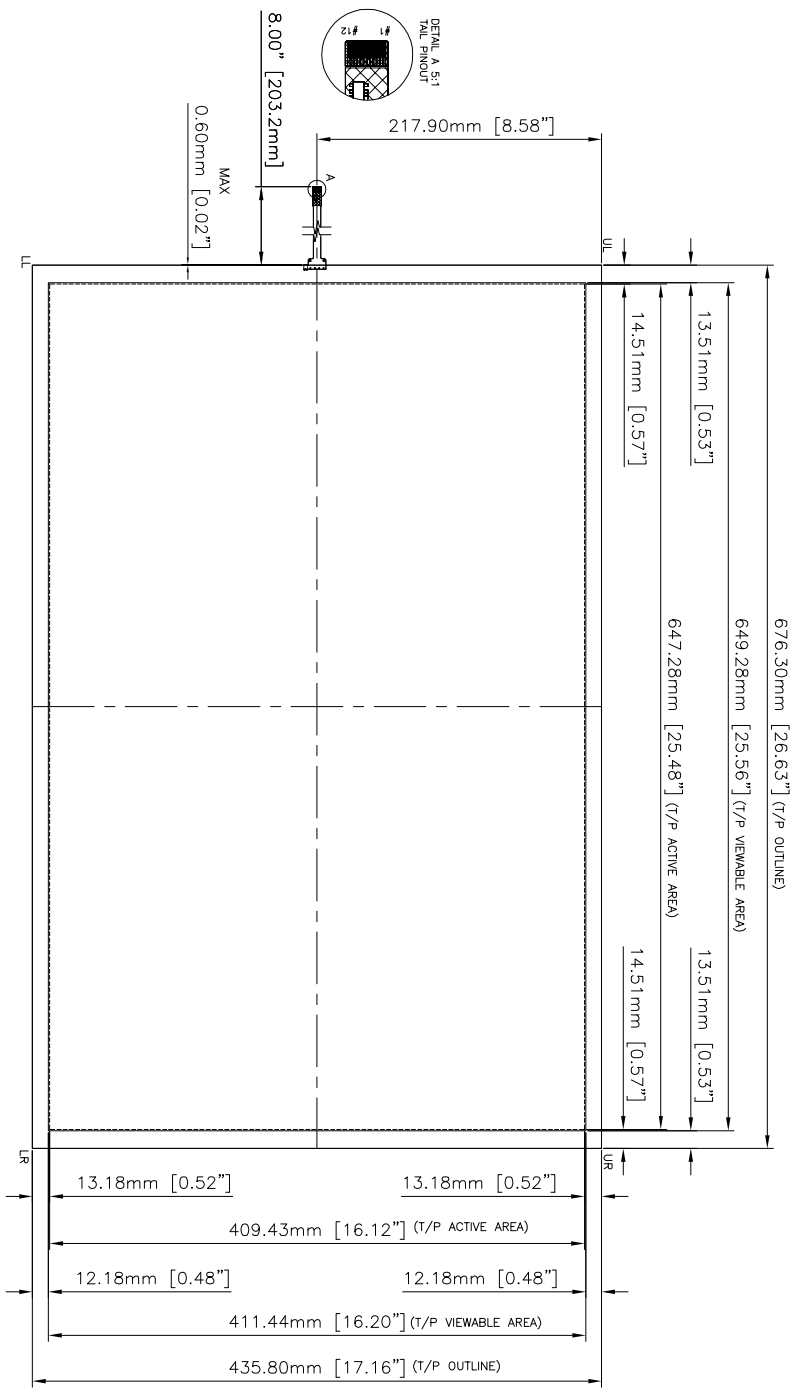

MAX TAIL CIRCUIT AREA THICKNESS
1.84mm [0.07"]

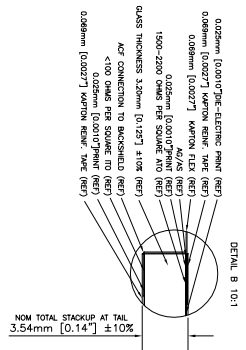

- NOTES
1. EDGE TREATMENT 0.005" MINIMUM
 2. ROHS COMPLIANT
 3. FRONT SURFACE AG-AS
 4. FRONT=1500-2200 OPS ATQ/BACK= <100 OPS TARGET ITO
 5. FSO HARDNESS >=6.0 MOHS
 6. ALL DIMENSIONAL TOLERANCES TO BE ±0.50mm UNLESS OTHERWISE SPECIFIED

INDICE OF PROPRIETARY RIGHTS
THIS DOCUMENT AND THE INFORMATION IT CONTAINS
IS PROPRIETARY TO WACOM IT MUST NOT BE REPRODUCED
(IN WHOLE OR IN PART) WITHOUT WRITTEN PERMISSION
FROM WACOM

Wacom Technology Corporation
1809 - 4th Industrial Blvd.
Creston, IA 50821
PH:512-275-0604
FX:512-275-0605

DO NOT SCALE
DRAWING
TOL:
X = ±2.54mm
.XX = ±0.50mm
.XXX = ±0.38mm

DRWN	DATE	TITLE
RS	11/10/09	30.0" CAP_PLUS
ENG CHK	DATE	CAPL-30W01-00A
APPROVED	DATE	

SCALE NA SIZE A DWG. NO. CAPL-30W01-00A-R1.dwg REV. 1